

BERJAYA®

Quality Variety Reliability



QUALITY
COMMERCIAL
REFRIGERATOR

Refrigerator Manufacturer & Exporter

2023
EDITION

COUNTER CHILLER

Magnetic Solid Door • Tested at ambient temperature of 38°C




BS 2DC4/Z-N



BS 2DC4/Z • BS 2DC5/Z • BS 2DC6/Z



BS 3DC7/Z • BS 3DC8/Z

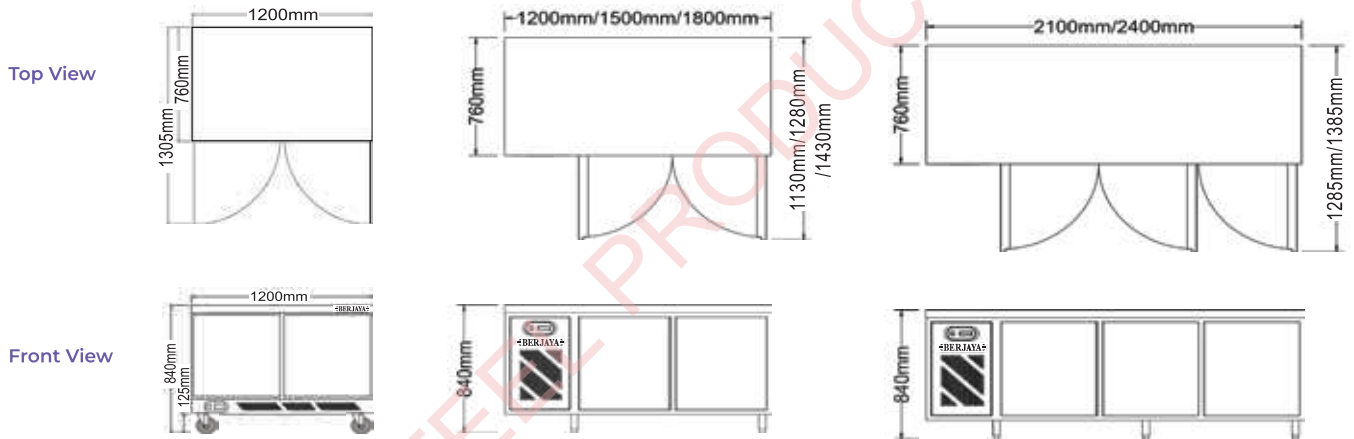

	2 Door-4'	2 Door-4'	2 Door-5'	2 Door-6'	3 Door-7'	3 Door-8'
MODEL	BS 2DC4/Z-N	BS 2DC4/Z	BS 2DC5/Z	BS 2DC6/Z	BS 3DC7/Z	BS 3DC8/Z
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1200 x 760 x 840	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)	233	262	366	472	576	681
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	385	530	530	581	646	646
Wattage (W)	319 - 353	246 - 272	278 - 307	371 - 410	373 - 413	377 - 416
Ampere (A)	2.1 - 2.3	1.6 - 1.8	1.8 - 2.0	2.5 - 2.8	2.5 - 2.7	2.7 - 2.9
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital	Digital
PVC Coated Shelving	4	4	4	4	6	6
Weight (kg)	89	86	98	112	134	146
Unit For 20ft Container	22	22	20	14	14	8
Unit For 40ft Container	46	46	42	28	28	16

*Available on 600 Series and 700 Series

Note:

Option : CW - Castor Wheel / BF - Bullet Feet