



HOSHIZAKI



UNDERCOUNTER SERIES

- depth 600mm
 - refrigerator > **RT-96MA-S** > **RT-126MA-S** > **RT-156MA-S** > **RT-186MA-S**
 - freezer > **FT-96MA-S** > **FT-126MA-S** > **FT-156MA-S** > **FT-186MA-S**
- depth 750mm
 - refrigerator > **RT-98MA-S** > **RT-128MA-S** > **RT-158MA-S** > **RT-188MA-S**
 - freezer > **FT-98MA-S** > **FT-128MA-S** > **FT-158MA-S** > **FT-188MA-S**



HOSHIZAKI



> COMBO SERIES

> UPRIGHT SERIES

REACH-IN SERIES

- refrigerator > **HR-78MA-S** > **HR-128MA-S** > **HR-148MA-S** > **HR-188MA-S**
- freezer > **HF-78MA-S** > **HF-128MA-S** > **HF-148MA-S** > **HF-188MA-S**
- * combo > **HRF-78MA-S** > **HRF-128MA-S** > **HRF-148MA-S** > **HRF-188MA-S**

(*dual temperature in a single unit)



HOSHIZAKI



A-FIT SERIES

A-FIT FEATURES

- > efficient cooling with improved defrost system
- > special coating for a more durable evaporator
- > advanced electric controller with clear digital display
- > drain heater available

- > removable door gaskets
- > rounded edges for easy cleaning
- > automatic closing doors reduces energy consumption
- > adjustable legs
- > full height handle



- > pull out cassette compressor for easy maintenance (for undercounter units)

- > removable refrigerator unit (for upright units)




HOSHIZAKI A-FIT

In line with our focus on engineering refrigeration systems suitable for each market segment, the A-FIT series is designed for those who seek the basics. Simple in outlook yet uncompromising on cooling technologies; any A-FIT refrigerator, freezer and upright combination will provide an all-round efficiency.




REFRIGERATOR & FREEZER (UNDERCOUNTER 600MM DEPTH)




- > REFRIGERATOR **RT-96MA-S**
- > REFRIGERATOR **RT-126MA-S**
- > REFRIGERATOR **RT-156MA-S**
- > REFRIGERATOR **RT-186MA-S**
- > FREEZER **FT-96MA-S**
- > FREEZER **FT-126MA-S**
- > FREEZER **FT-156MA-S**
- > FREEZER **FT-186MA-S**

REFRIGERATOR & FREEZER (UNDERCOUNTER 750MM DEPTH)




- > REFRIGERATOR **RT-98MA-S**
- > REFRIGERATOR **RT-128MA-S**
- > REFRIGERATOR **RT-158MA-S**
- > REFRIGERATOR **RT-188MA-S**
- > FREEZER **FT-98MA-S**
- > FREEZER **FT-128MA-S**
- > FREEZER **FT-158MA-S**
- > FREEZER **FT-188MA-S**

REFRIGERATOR & FREEZER (REACH-IN)

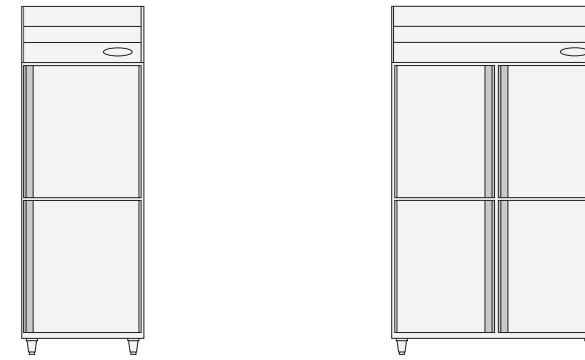


- > REFRIGERATOR **HR-78MA-S**
- > REFRIGERATOR **HR-128MA-S**
- > FREEZER **HF-78MA-S**
- > FREEZER **HF-128MA-S**

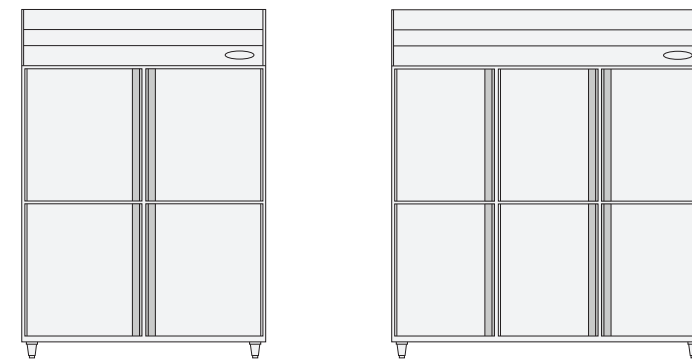


- > REFRIGERATOR **HR-148MA-S**
- > REFRIGERATOR **HR-188MA-S**
- > FREEZER **HF-148MA-S**
- > FREEZER **HF-188MA-S**

REFRIGERATOR & FREEZER (COMBO REACH-IN)

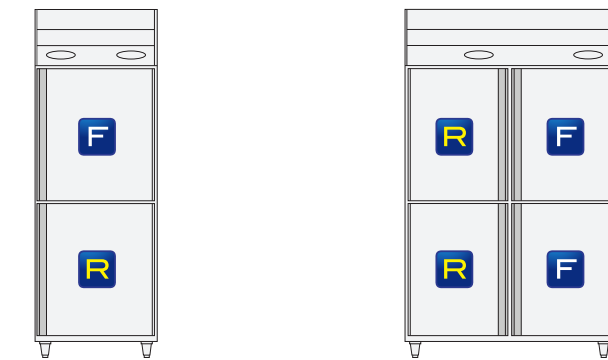

- > REFRIGERATOR & FREEZER **HRF-78MA-S**
- > REFRIGERATOR & FREEZER **HRF-128MA-S**

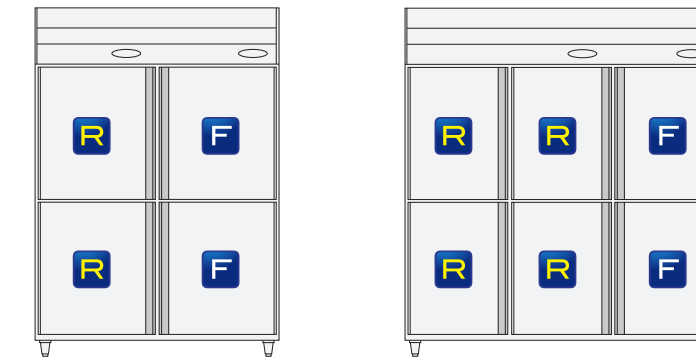

- > REFRIGERATOR & FREEZER **HRF-148MA-S**
- > REFRIGERATOR & FREEZER **HRF-188MA-S**



FREEZER



REFRIGERATOR

A-FIT SERIES Refrigerator

Undercounter Type (Depth 600mm)	RT-96MA-S	RT-126MA-S	RT-156MA-S	RT-186MA-S
POWER SUPPLY	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz
HEAT REJECTION	340W	350W	360W	380W
STORAGE CAPACITY	151L	231L	318L	401L
EXTERNAL DIMENSIONS	W900-D600-H850mm	W1200-D600-H850mm	W1500-D600-H850mm	W1800-D600-H850mm
NET WEIGHT	55kg	67kg	80kg	93kg
Undercounter Type (Depth 750mm)	RT-98MA-S	RT-128MA-S	RT-158MA-S	RT-188MA-S
POWER SUPPLY	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz
HEAT REJECTION	340W	350W	360W	380W
STORAGE CAPACITY	199L	307L	420L	530L
EXTERNAL DIMENSIONS	W900-D750-H850mm	W1200-D750-H850mm	W1500-D750-H850mm	W1800-D750-H850mm
NET WEIGHT	60kg	73kg	87kg	101kg

- OPERATION CONDITIONS : Ambient Temperature 5°C~38°C Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -2°C~-12°C

A-FIT SERIES Freezer

Undercounter Type (Depth 600mm)	FT-96MA-S	FT-126MA-S	FT-156MA-S	FT-186MA-S
POWER SUPPLY	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz
HEAT REJECTION	640W	670W	670W	710W
STORAGE CAPACITY	151L	231L	318L	401L
EXTERNAL DIMENSIONS	W900-D600-H850mm	W1200-D600-H850mm	W1500-D600-H850mm	W1800-D600-H850mm
NET WEIGHT	59kg	72kg	86kg	99kg
Undercounter Type (Depth 750mm)	FT-98MA-S	FT-128MA-S	FT-158MA-S	FT-188MA-S
POWER SUPPLY	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz	1/220-240V 50Hz
HEAT REJECTION	640W	670W	710W	710W
STORAGE CAPACITY	199L	307L	420L	530L
EXTERNAL DIMENSIONS	W900-D750-H850mm	W1200-D750-H850mm	W1500-D750-H850mm	W1800-D750-H850mm
NET WEIGHT	64kg	78kg	93kg	107kg

- OPERATION CONDITIONS : Ambient Temperature 5°C~38°C Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -23°C~-7°C

A-FIT SERIES Refrigerator

Reach-in Type	HR-78MA-S	HR-128MA-S	HR-148MA-S	HR-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	410W	560W	610W	790W
STORAGE CAPACITY	600L	1110L	1310L	1720L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	130kg	152kg	203kg

- OPERATION CONDITIONS : Ambient Temperature 5°C~43°C Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -2°C~-12°C

A-FIT SERIES Freezer

Reach-in Type	HF-78MA-S	HF-128MA-S	HF-148MA-S	HF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	670W	1030W	1150W	1210W
STORAGE CAPACITY	600L	1100L	1300L	1710L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	140kg	152kg	213kg

- OPERATION CONDITIONS : Ambient Temperature 5°C~43°C Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -23°C~-7°C

A-FIT SERIES Combo

Reach-in Type	HRF-78MA-S	HRF-128MA-S	HRF-148MA-S	HRF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	1030W	1140W	1140W	1320W
STORAGE CAPACITY	540L	908L	1100L	1523L
	REFRIGERATOR 260L FREEZER 280L	REFRIGERATOR 454L FREEZER 454L	REFRIGERATOR 550L FREEZER 550L	REFRIGERATOR 1025L FREEZER 498L
EXTERNAL DIMENSIONS	W700-D800-H2050	W1200-D800-H2050	W1400-D800-H2050	W1800-D800-H2050
NET WEIGHT	121kg	167kg	183kg	216kg

- OPERATION CONDITIONS : Ambient Temperature 5°C ~ 43°C Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

REFRIGERATOR TEMPERATURE CONTROL: -2°C~-12°C

FREEZER TEMPERATURE CONTROL: -23°C~-7°C