

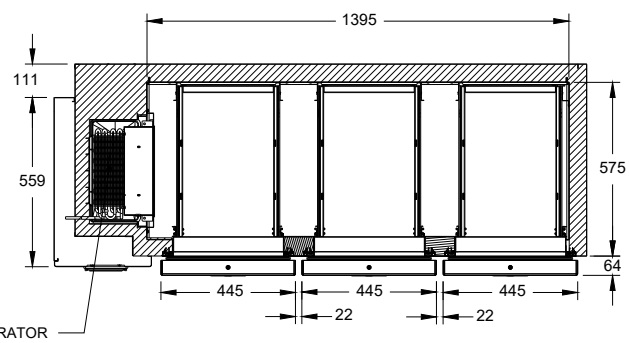
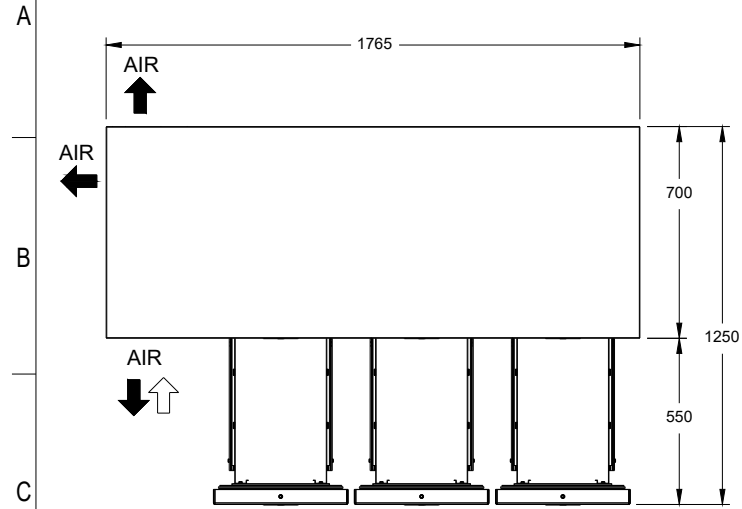


1	2	3	4	5	6	7	8				
NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.					CHANGE NOTE						
OPTIONS: 1. LOCK ARE OPTIONAL 2. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430		NOTE: 1. DRAWER MUST BE USED WITH GN PAN. 2. MAXIMUM DEPTH OF PAN CAN BE 100MM 3. MACHINE DOES NOT SUPPLY WITH GN PAN			REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN

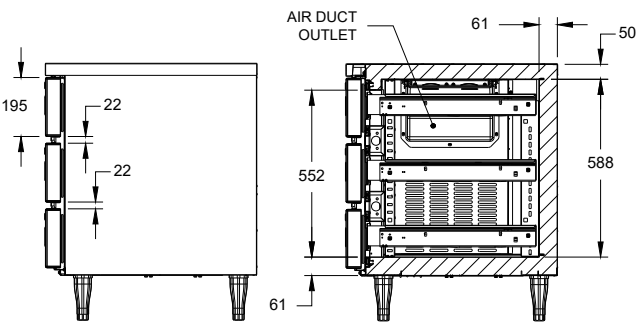

SECTION B-B

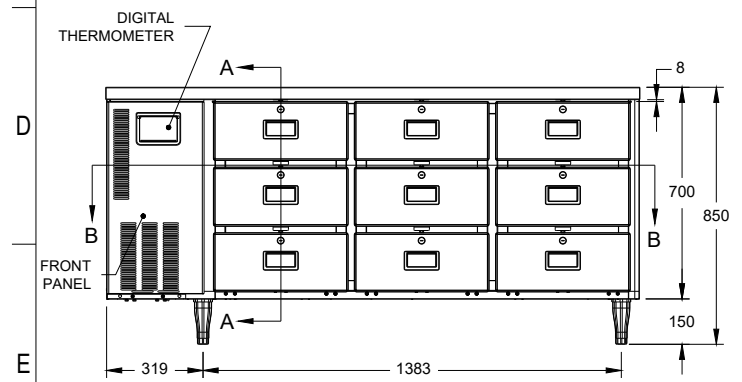

SECTION A-A

ITEM	HOSHIZAKI REFRIGERATOR
MODEL	RTDW187MS4-333
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
AMPERAGE	2.0 AMPS
ELECTRIC CONSUMPTION	308 W
HEAT REJECTION	0.761KW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	318L
OUTSIDE DIMENSIONS	1765 (W) X 700 (D) X 850 (H - WITH 150MM LEG)
INSIDE DIMENSIONS	1395 (W) X 575 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	PUF (CFC FREE) /LT,RT,BACK & BOTTOM : 60MM & TOP : 50MM
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST SYSTEM	IN COMPRESSOR OFF CYCLE
COMPRESSOR	HERMATIC 493 W
CONDENSER	FORCED (STEEL, WIRE ON TUBE TYPE)
EVAPORATOR	FORCED (AL. FIN & CU.TUBE)
REFRIGERANT NO./ MASS	R134a / 165 gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -2°C TO +12°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
LEG	4 NOS, PLASTIC ADJUSTABLE LEGS 150 TO 170MM
SHELF	NOT APPLICABLE
WEIGHT	NET: 176 KG (GROSS: APPROX 203KG)
PACKAGE	CARTON (WOODEN PALLET) 1835MM (W) X 830MM (D) X 875MM(H)
ASSESSORIES	NOT APPLICABLE
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%


\*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

- INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED. ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
- THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230V AC 50HZ. THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230V AC 50HZ.
- TOLERANCE ON WEIGHT IS ±5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE. COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS. REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY. REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.

UNSPECIFIED TOLERANCES						SCALE: NTS ALL DIMENSIONS ARE IN MM	DRAWN BY GANESH	CHECKED BY PRATAP	APPROVED BY PARESH	TITLE <b>UNDERCOUNTER DRAWER REFRIGERATOR</b>	DWG. NO: <b>0710360</b>	REVISION <b>A</b>	
DIM	<6	7-30	30-120	120-400	400-1000								>1000
TOL	±0.5	±0.5	±0.8	±1.0	±1.5								±2.0
UNSPECIFIED TOL. ON ANGLE ±1.0													
1  DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH * ( ) 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS													
REFERENCE STANDARD													

MODEL	<b>RTDW187MS4-333</b>
RELEASE DATE	12.01.19
SHEET	1 OF 2
RELEASE STAGE:	<b>RELEASED</b>





FIPDC/39, REV/C  
 DATE: 15.11.2017  
 THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.



NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

- OPTIONS:
1. LOCK ARE OPTIONAL
  2. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430

- NOTE:
1. DRAWER MUST BE USED WITH GN PAN.
  2. MAXIMUM DEPTH OF PAN CAN BE 100MM
  3. MACHINE DOES NOT SUPPLY WITH GN PAN

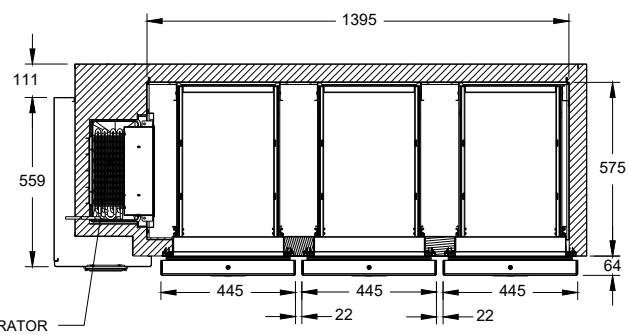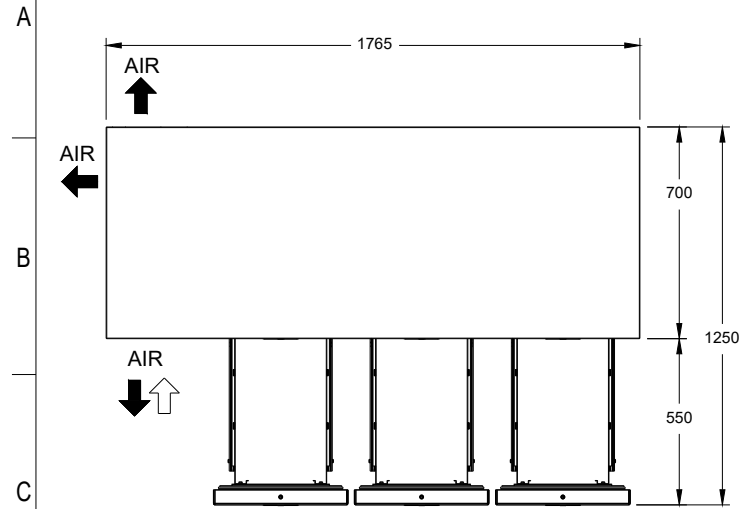

SECTION B-B

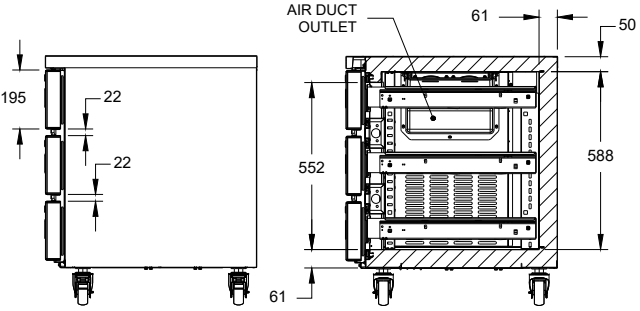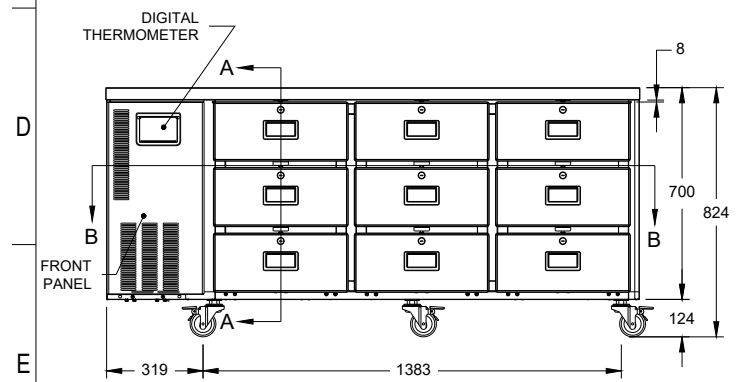

SECTION A-A

ITEM	HOSHIZAKI REFRIGERATOR
MODEL	RTDW187MS4-333
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
AMPERAGE	2.0 AMPS
ELECTRIC CONSUMPTION	308 W
HEAT REJECTION	0.761KW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	318L
OUTSIDE DIMENSIONS	1765 (W) X 700 (D) X 824 (WITH CASTOR)
INSIDE DIMENSIONS	1395 (W) X 575 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	PUF (CFC FREE) /LT,RT,BACK & BOTTOM : 60MM & TOP : 50MM
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	IN COMPRESSOR OFF CYCLE
COMPRESSOR	HERMATIC 493 W
CONDENSER	FORCED (STEEL, WIRE ON TUBE TYPE)
EVAPORATOR	FORCED (AL. FIN & CU.TUBE)
REFRIGERANT NO./ MASS	R134a / 165 gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -2°C TO +12°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	6 NOS NON ADJUSTABLE
SHELF	NOT APPLICABLE
WEIGHT	NET: 179 KG (GROSS: APPROX 206KG)
PACKAGE	CARTON (WOODEN PALLET) 1835MM (W) X 830MM (D) X 875MM(H)
ASSESSORIES	NOT APPLICABLE
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%

\*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.  
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230V AC 50HZ.  
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230V AC 50HZ.
3. TOLERANCE ON WEIGHT IS ±5 KG

SCALE: NTS  ALL DIMENSIONS ARE IN MM	TITLE <b>UNDERCOUNTER DRAWER REFRIGERATOR</b>		DWG. NO: <b>0710360</b>	REVISION <b>A</b>
	DRAWN BY GANESH	MODEL <b>RTDW187MS4-333</b>		
CHECKED BY PRATAP	RELEASE DATE <b>12.01.19</b>	SHEET <b>2 OF 2</b>		
APPROVED BY PARESH	RELEASE STAGE: <b>RELEASED</b>			